







RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25

SPECIFICATIONS

- Current rating: 0.5A AC, DC
- Voltage rating: 50V AC, DC
- Temperature range: -40°C ~ +85°C
- Insulation resistance: 500MΩ min.
- Withstanding voltage: 500V AC/minute.
- Contact resistance: 30mΩ max.

Material:
Housing: LCP UL94V-0 Natural
Terminal: Copper Alloy/Tin Plating
Fitting Nail: Copper Alloy/Tin Plating

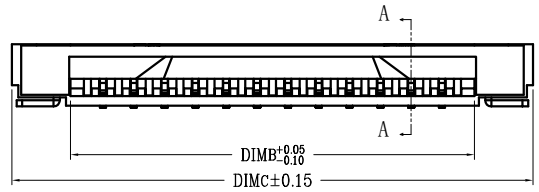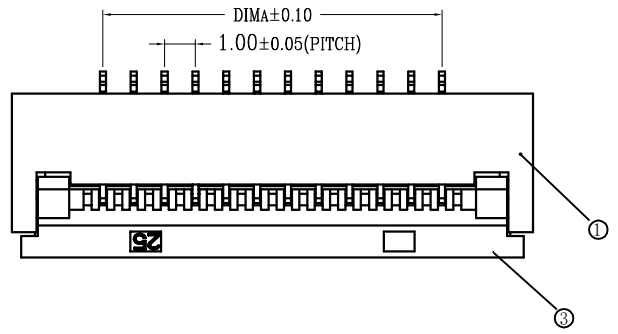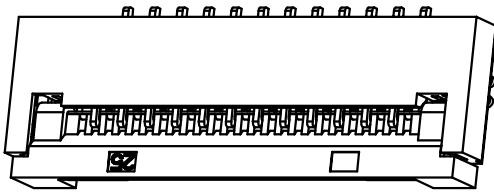



SECTION A-A

Ordering Code:


F1002-B-XX-20T-R
1 2 3 4

- 序列码
- Pin数: 10=10
- 电镀方式: T=镀锡 G=镀金
- 包装方式: T=管装 R=卷装

CKT	DIMA	DIMB	DIMC
2	1.00	3.10	6.90
3	2.00	4.10	7.90
4	3.00	5.10	8.90
5	4.00	6.10	9.90
6	5.00	7.10	10.90
7	6.00	8.10	11.90
8	7.00	9.10	12.90
9	8.00	10.10	13.90
10	9.00	11.10	14.90
11	10.00	12.10	15.90
12	11.00	13.10	16.90
13	12.00	14.10	17.90
14	13.00	15.10	18.90
15	14.00	16.10	19.90
16	15.00	17.10	20.90
17	16.00	18.10	21.90
18	17.00	19.10	22.90
19	18.00	20.10	23.90
20	19.00	21.10	24.90
21	20.00	22.10	25.90
22	21.00	23.10	26.90
23	22.00	24.10	27.90
24	23.00	25.10	28.90
25	24.00	26.10	29.90
26	25.00	27.10	30.90
27	26.00	28.10	31.90
28	27.00	29.10	32.90
29	28.00	30.10	33.90

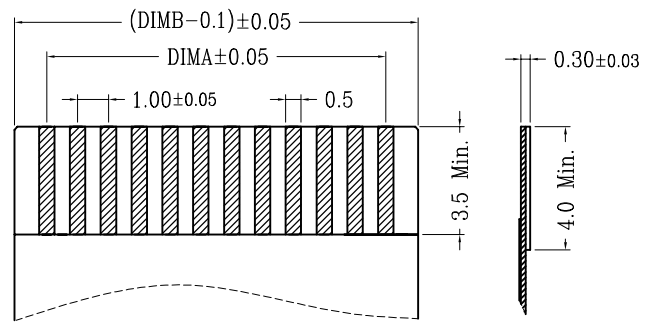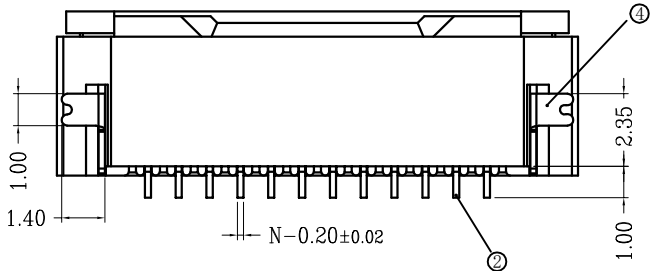

适用扁平线(Applicable Flat Cable)

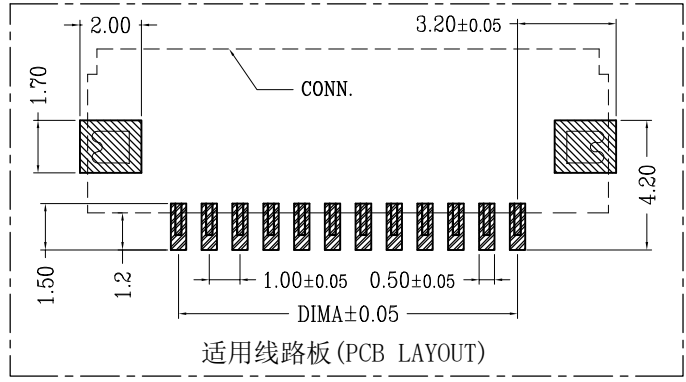

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO: F1002-B-XX-20T-R	
TITLE: 1.0mm Pitch 卧贴掀盖式下接(H=2.0)	
APPD	
CHKD	
DRAW	Wang
DATE	2024.04.15

XFCN 兴飞连接器

0769-82001899
www.xfconn.com

DWG NO: /

VIEW	
SCALE	NONE
SHEET	1:1
REV	A1