
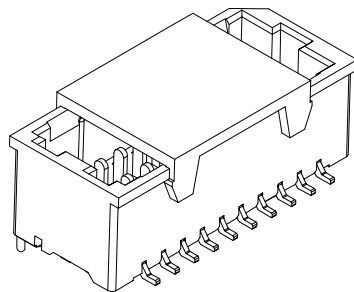


RoHS

REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25

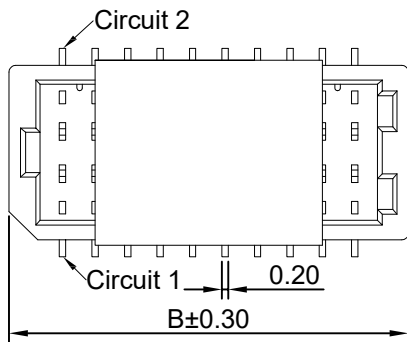

SPECIFICATIONS

1. Current rating: 1A AC, DC
- 2.Voltage rating: 50V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 100MQ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material:

Insulator: PA9T UL 94V-0

Contact: Phosphor Bronze or Brass

Solder Tab: Brass

Plating: Matte Tin or gold plated over Nickel

Circuits: 2~50

Mate with:XFCN P1010 series Housing




Ordering Code:

M1010VS-2xXX

1 2


1.序列号

2.Pin位数 2x05-2x25P

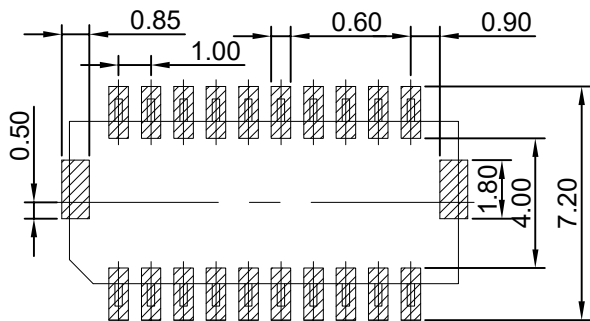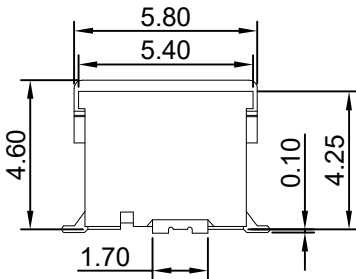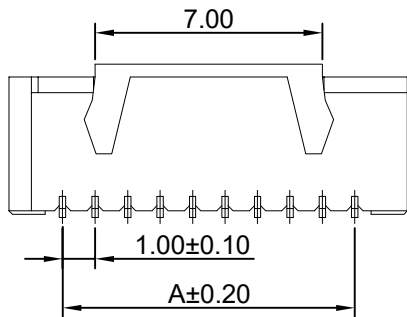

Recommand PCB Layout

No.of PIN/ROW	Dimension	
	A	B
2x05	4.00	7.30
2x06	5.00	8.30
2x08	7.00	10.30
2x10	9.00	12.30
2x15	14.00	17.30
2x20	19.00	22.30
2x25	24.00	27.30

X.±0.50	X.°±	PART NO: M1010VS-2xXX		XFCN 兴飞连接器				
.X±0.25	.X°±							
.XX±0.15	.XX°±	TITLE: 1.00mm Crimp Style Connectors		0769-82001899				
.XXX±0.10	.XXX°±			www.xfconn.com				
UNITS:	mm	APPD Chen ZhiQiang		DWG NO: /				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED.COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN				CHKD Liu Wei		VIEW		
				DRAW Chen HongJiang		SCALE	SHEET	REV
				DATE 2024.07.24		NONE	1/1	A1