


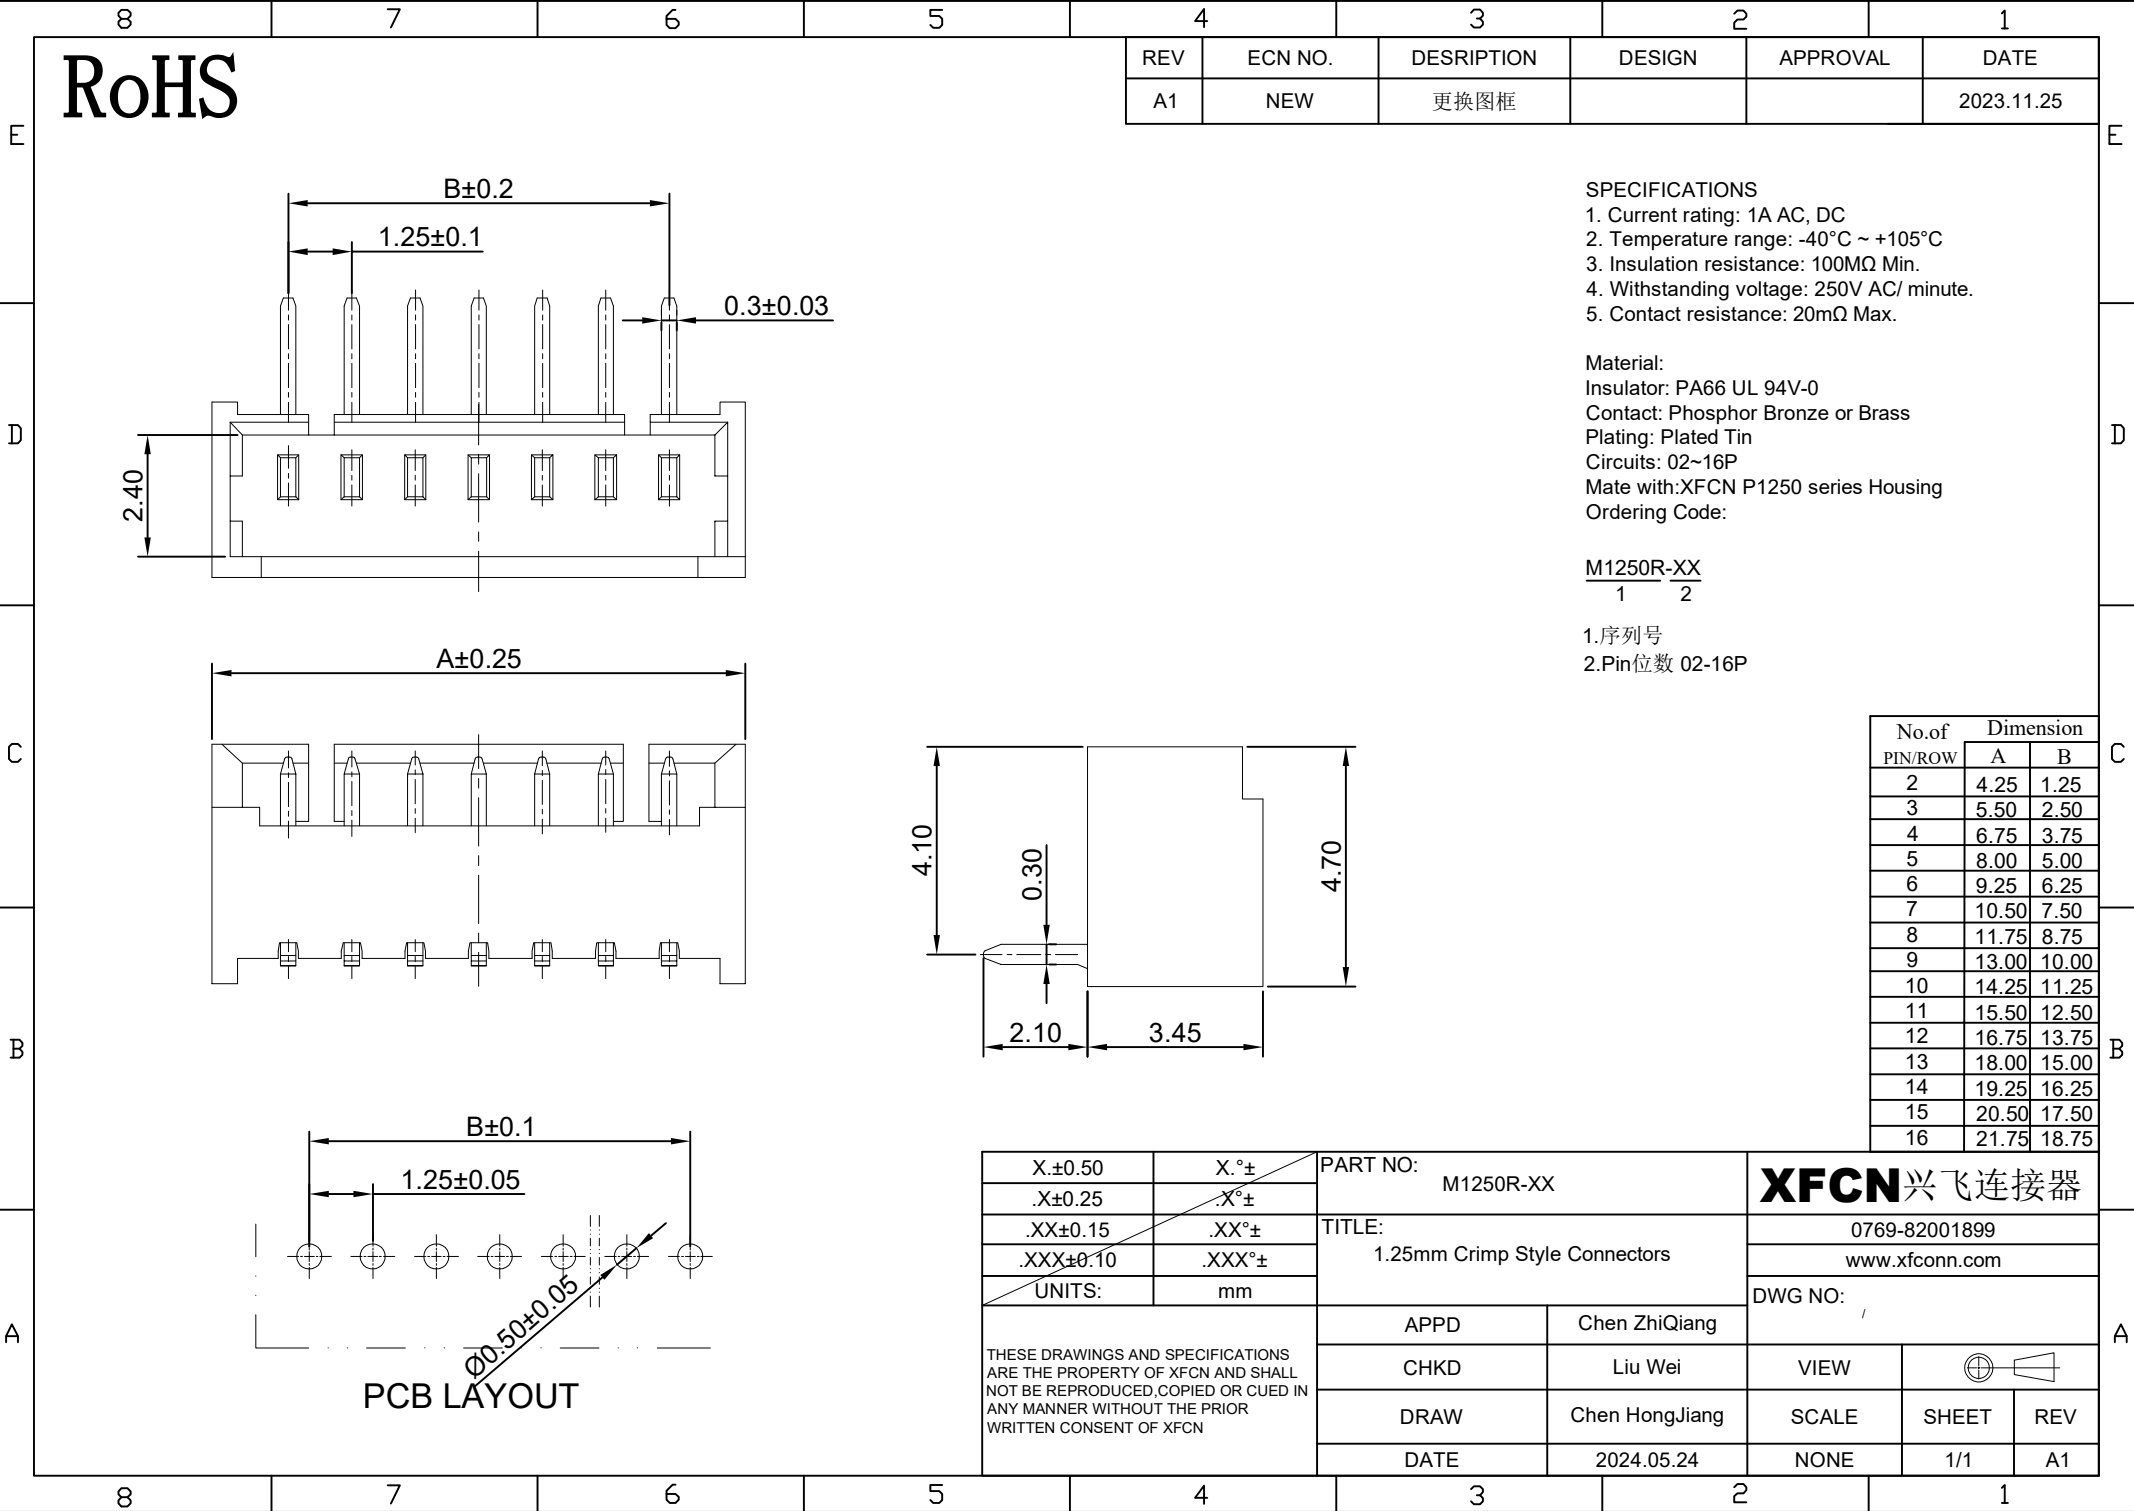

REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25

SPECIFICATIONS

- Current rating: 1A AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:
Insulator: PA66 UL 94V-0
Contact: Phosphor Bronze or Brass
Plating: Plated Tin
Circuits: 02~16P
Mate with:XFCN P1250 series Housing
Ordering Code:

M1250R-XX
1 2

1.序列号
2.Pin位数 02-16P

No.of PIN/ROW	Dimension	
	A	B
2	4.25	1.25
3	5.50	2.50
4	6.75	3.75
5	8.00	5.00
6	9.25	6.25
7	10.50	7.50
8	11.75	8.75
9	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50
16	21.75	18.75

X.±0.50	X.°±	PART NO: M1250R-XX		XFCN 兴飞连接器				
.X±0.25	.X°±							
.XX±0.15	.XX°±	TITLE: 1.25mm Crimp Style Connectors		0769-82001899				
.XXX±0.10	.XXX°±			www.xfconn.com				
UNITS:	mm	APPD Chen ZhiQiang		DWG NO: /				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN				CHKD Liu Wei		VIEW		
				DRAW Chen HongJiang		SCALE	SHEET	REV
				DATE 2024.05.24		NONE	1/1	A1