
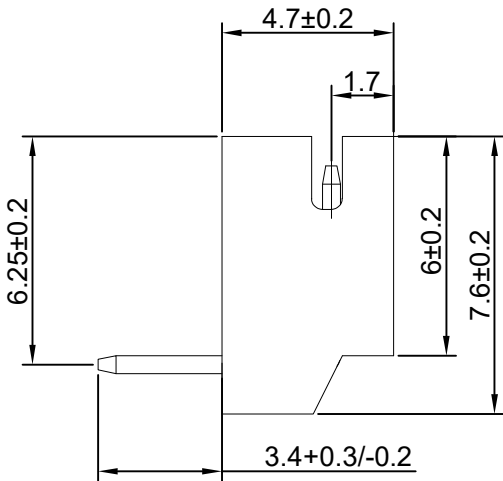


RoHS

REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

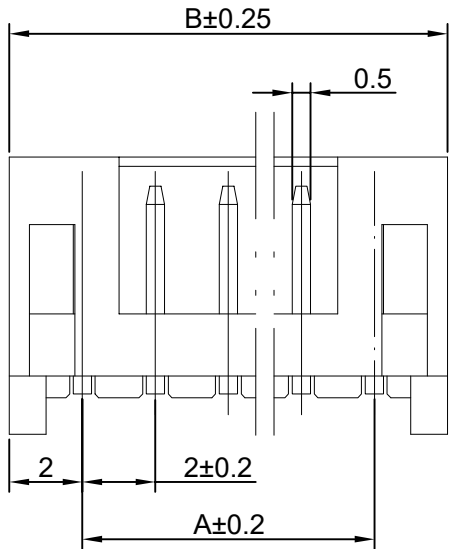

SPECIFICATIONS

1. Current rating: 2A
2. Temperature range: -25°C ~ +85°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 800V AC/ minute.
5. Contact resistance: 20mΩ Max.

Material:

Insulator Material:Nylon66.UL94V-0(2)

Contact Material: Brass



Contact Area Plating: Tin-Plated
with XFCN P2010 series Housing

Ordering Code:

M2010R-K-XX
1 2

1.序列号

2.Pin位数: 02-18P

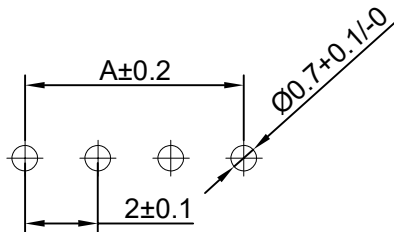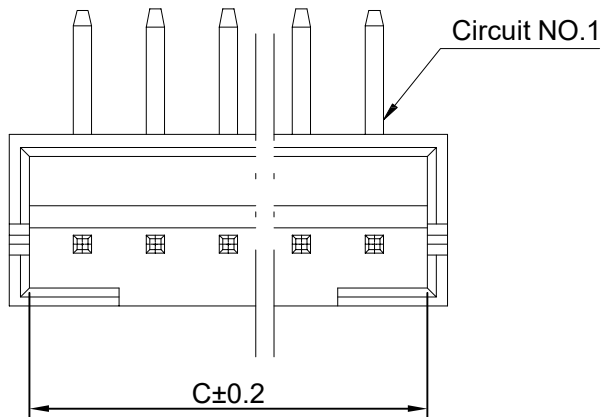

PCB LAYOUT

No.of PIN/ROW	Dimension		
	A	B	C
02	2.00	6.00	4.90
03	4.00	8.00	6.90
04	6.00	10.00	8.90
05	8.00	12.00	10.90
06	10.00	14.00	12.90
07	12.00	16.00	14.90
08	14.00	18.00	16.90
09	16.00	20.00	18.90
10	18.00	22.00	20.90
11	20.00	24.00	22.90
12	22.00	26.00	24.90
13	24.00	28.00	26.90
14	26.00	30.00	28.90
15	28.00	32.00	30.90
16	30.00	34.00	32.90
17	32.00	36.00	34.90
18	34.00	38.00	36.90

X.±0.50	X.°±	PART NO: M2010R-K-XX		XFCN 兴飞连接器				
.X±0.25	.X°±							
.XX±0.15	.XX°±	TITLE: 2.00mm Crimp Style Connectors		0769-82001899				
.XXX±0.10	.XXX°±			www.xfconn.com				
UNITS:	mm	DWG NO: /		VIEW 				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN								
							APPD	Chen ZhiQiang
							CHKD	Liu Wei
							DRAW	Chen HongJiang
		DATE	2024.08.05	NONE	1/1	A1		