

RoHS

REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

SPECIFICATIONS

- Current rating: 2A
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:





Insulator Material: PA6T.UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated
with XFCN P2010 series Housing

Ordering Code:


M2010RS-XX
1 2

1.序列号

2.Pin位数: 02-16P

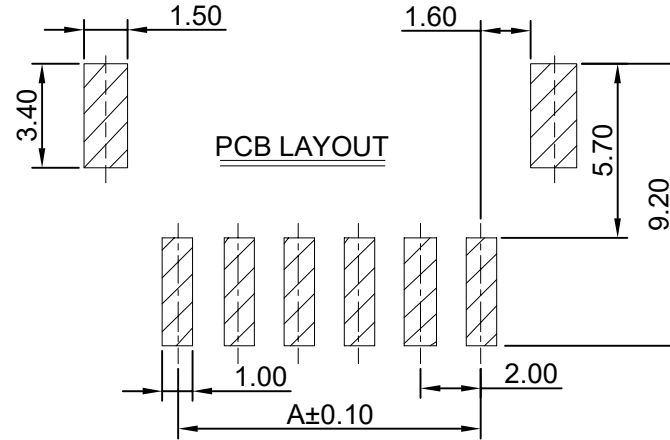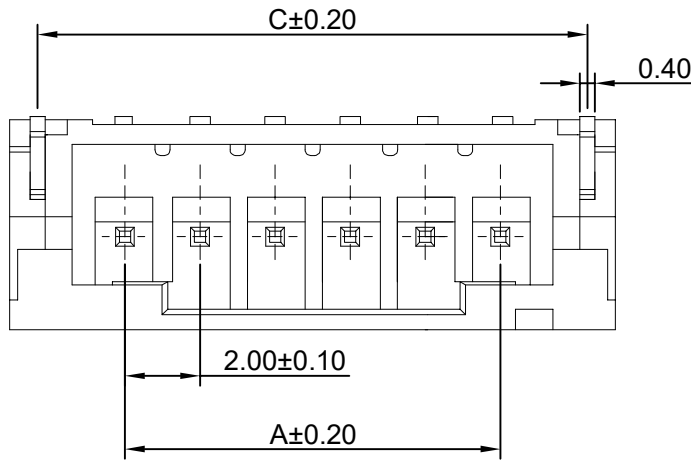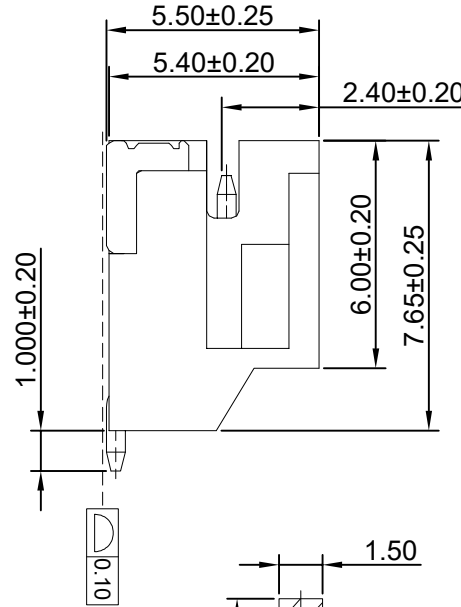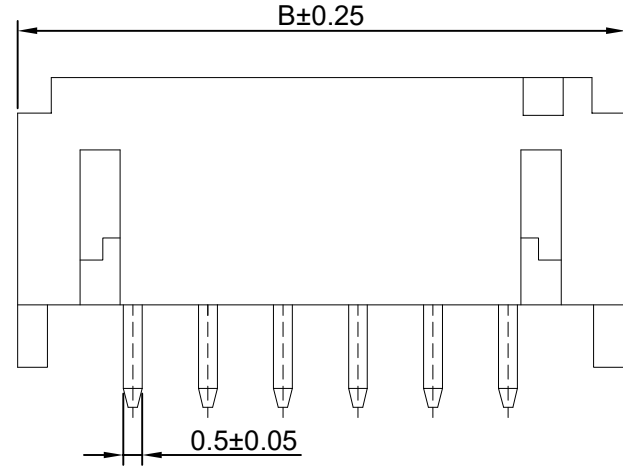

No.of PIN/ROW	Dimension	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

X.±0.50	X.°±	PART NO: M2010RS-XX	XFCN 兴飞连接器					
.X±0.25	.X°±							
.XX±0.15	.XX°±		TITLE: 2.00mm Crimp Style Connectors	0769-82001899				
.XXX±0.10	.XXX°±			www.xfconn.com				
UNITS:	mm	DWG NO: /						
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang		VIEW			
		CHKD	Liu Wei					
		DRAW	Chen HongJiang		SCALE	SHEET	REV	
		DATE	2024.08.05		NONE	1/1	A1	