



RoHS





REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

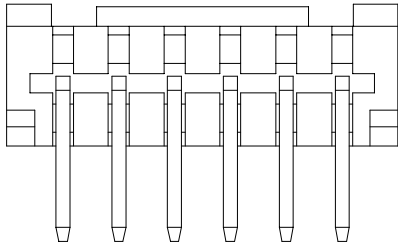


- SPECIFICATIONS
1. Current rating: 3 A
 2. Temperature range: -25°C ~ +85°C
 3. Insulation resistance: 1000MΩ Min.
 4. Withstanding voltage: 1000V AC/ minute.
 5. Contact resistance: 20mΩ Max.

Material:
Insulator Material:Nylon66.UL94V-0
Contact Material:Brass
Contact Area Plating: Tin-Plated
with XFCN P2016 series Housing

Ordering Code:
M2016R-K-XX
1 2
1.序列号
2.Pin位数: 02-16P

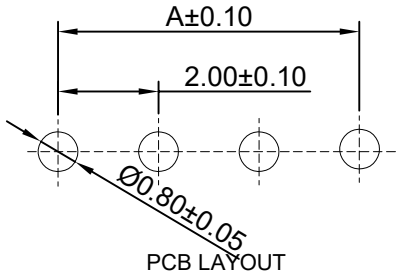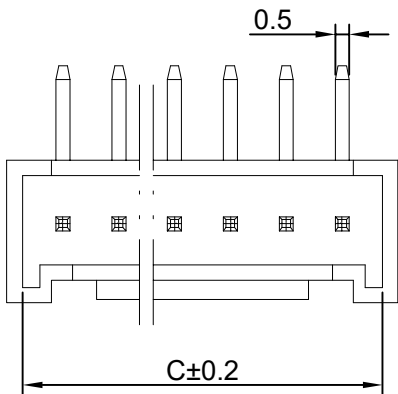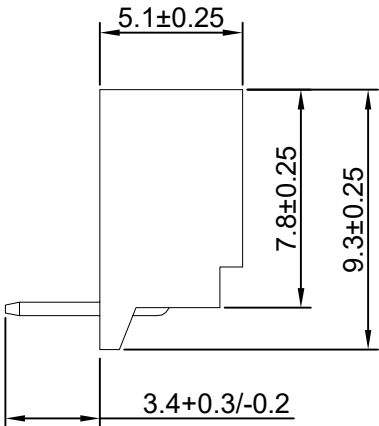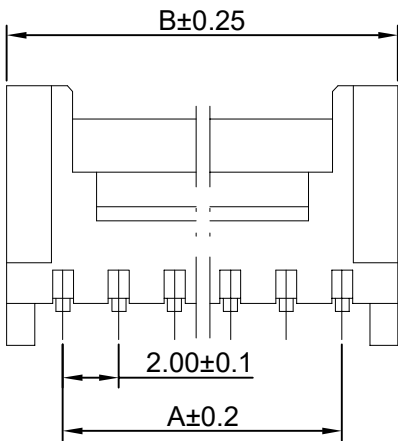

No.of PIN/ROW	Dimension		
	A	B	C
02	2.00	6.00	4.90
03	4.00	8.00	6.90
04	6.00	10.00	8.90
05	8.00	12.00	10.90
06	10.00	14.00	12.90
07	12.00	16.00	14.90
08	14.00	18.00	16.90
09	16.00	20.00	18.90
10	18.00	22.00	20.90
11	20.00	24.00	22.90
12	22.00	26.00	24.90
13	24.00	28.00	26.90
14	26.00	30.00	28.90
15	28.00	32.00	30.90
16	30.00	34.00	32.90

X.±0.50	X.°±	PART NO: M2016R-K-XX	XFCN 兴飞连接器			
.X±0.25	.X°±					
.XX±0.15	.XX°±	TITLE: 2.00mm Crimp Style Connectors	0769-82001899			
.XXX±0.10	.XXX°±		www.xfconn.com			
UNITS:	mm	DWG NO:				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang	VIEW		
		CHKD	Liu Wei			
		DRAW	Chen HongJiang	SCALE	SHEET	REV
		DATE	2024.08.05	NONE	1/1	A1