

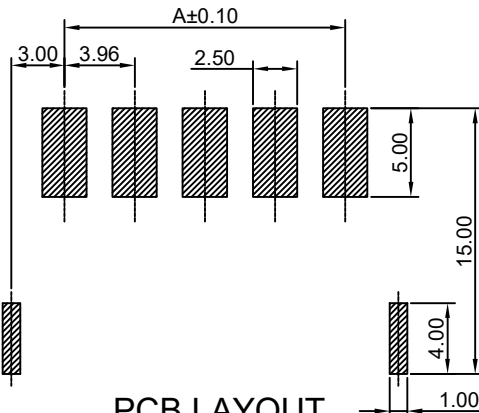
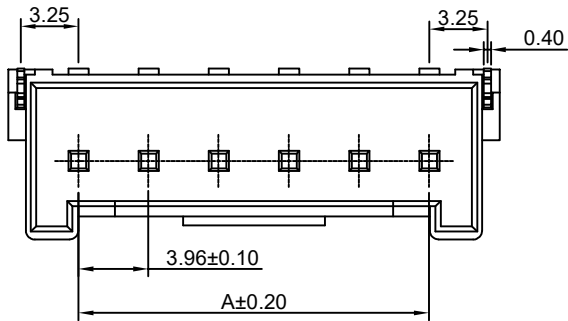
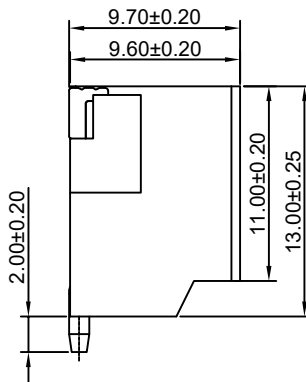


RoHS

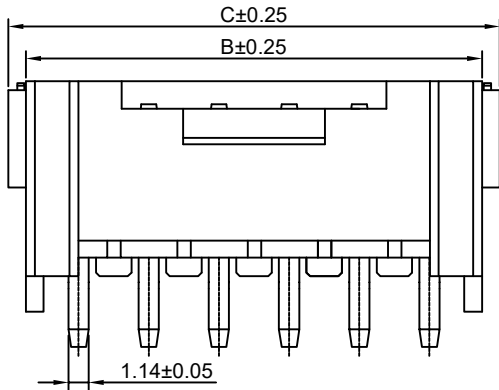

PCB LAYOUT



SPECIFICATIONS

1. Current rating: 7A
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 1500V AC/ minute.
5. Contact resistance: 20mΩ Max.

Material:

Insulator Material:LCP UL94V-0
Contact Material:Brass
Contact Plating:Tin-Plated
Mate with XFCN P3960 series Housing

Ordering Code:

M3960RS-XX-LP-R
1 2 3 4

- 1.序列号
- 2.Pin位数: 02-12P
- 3.LP:塑胶LCP
- 4.R: 卷装

No.of PIN/ROW	Dimension		
	A	B	C
02	3.96	9.90	11.88
03	7.92	13.86	15.84
04	11.88	17.82	19.80
05	15.84	21.78	23.76
06	19.80	25.74	27.72
07	23.76	29.70	31.68
08	27.72	33.66	35.64
09	31.68	37.62	39.60
10	35.64	41.58	43.56
11	39.60	45.54	47.52
12	43.56	49.50	51.48

X.±0.50	X.°±
.XX±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF XFCN AND SHALL
NOT BE REPRODUCED, COPIED OR CUED IN
ANY MANNER WITHOUT THE PRIOR
WRITTEN CONSENT OF XFCN

PART NO: M3960RS-XX-LP-R	
TITLE: 3.96mm Crimp Style Connectors	
APPD	Chen ZhiQiang
CHKD	Liu Wei
DRAW	Chen HongJiang
DATE	2024.08.01

XFCN 兴飞连接器		
0769-82001899		
www.xfconn.com		
DWG NO: /		
VIEW		
SCALE	SHEET	REV
NONE	1/1	A1