
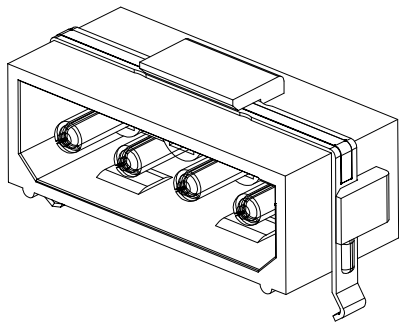





RoHS

REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

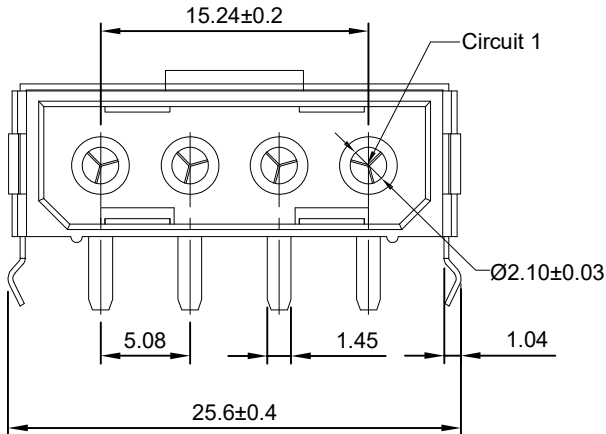

- SPECIFICATIONS**
1. Rated current: 10A AC, DC
 2. Rating voltage: 250V AC DC
 3. Temperature range: -25°C ~ +85°C
 4. Insulation resistance: 1000MΩ Min.
 5. Withstand voltage: 1500V AC/Minute
 6. Contact resistance: 20mΩ Max.

Material:
Insulator :PA66 UL94V-0 (2)
TContact :Brass
Plating: Tin-Plated
Circuits: 04P
Mate with P5082 series housing

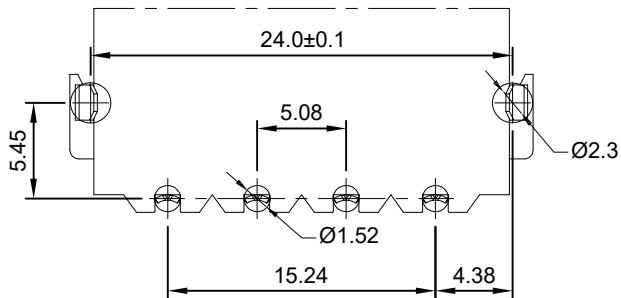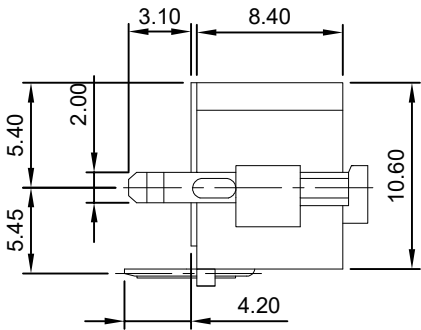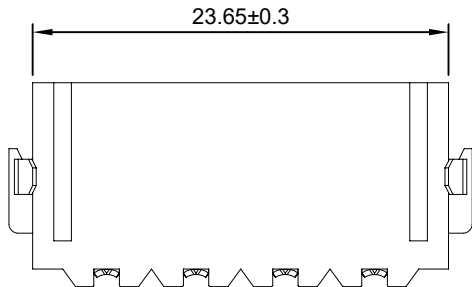

Recommended P.C.B Layout
General Tolerance±0.05

X.±0.50	X.°±	PART NO: M5082RK-B-04P		XFCN 兴飞连接器	
.XX±0.25	.X°±				
.XX±0.15	.XX°±	TITLE: 5.08mm Crimp Style Connectors		0769-82001899	
.XXX±0.10	.XXX°±			www.xfconn.com	
UNITS:	mm			DWG NO:	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang		
		CHKD	Liu Wei	VIEW	
		DRAW	Chen HongJiang	SCALE	SHEET REV
		DATE	2024.08.15	NONE	1/1 A1