
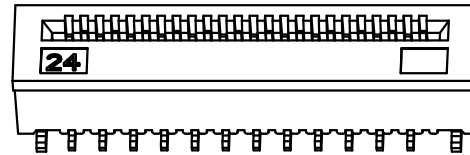


RoHS

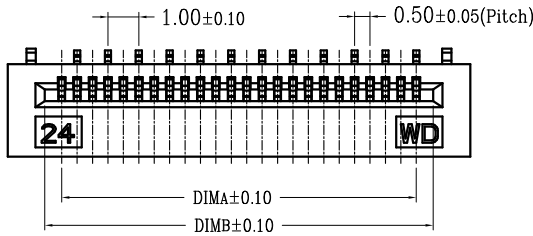

SPECIFICATIONS




1. Current rating: 0.5A AC, DC
2. Voltage rating: 50V AC, DC
3. Temperature range: -25°C ~ +85°C
4. Insulation resistance: 500MΩ min.
5. Withstanding voltage: 250V AC/minute.
6. Contact resistance: 30mΩ max.

Material:

Housing: LCP UL94V-0 Natural

Terminal: Copper Alloy/Tin Plating

Fitting Nail: Copper Alloy/Tin Plating

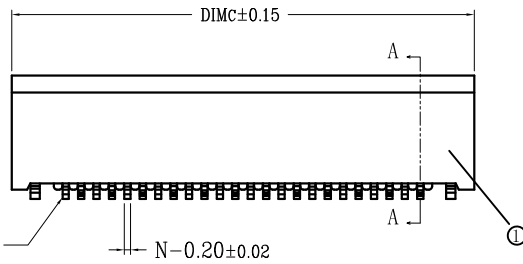

SECTION A-A

Ordering Code:



F0506-ZV-XX-40T-R
1 2 3 4

1.序列码

2.Pin数: 10=10

3.电镀方式: T=镀锡 G=镀金

4.包装方式: T=管装 R=卷装

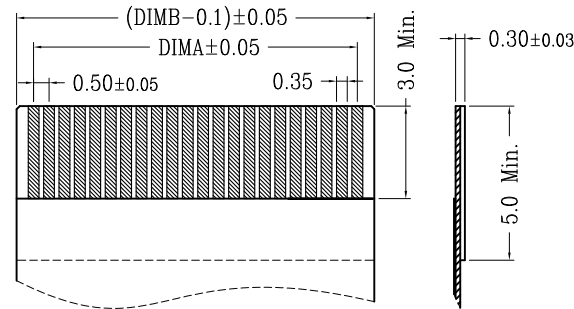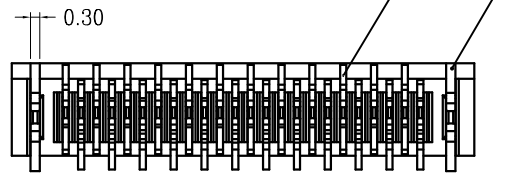

适用扁平线(Applicable Flat Cable)

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO: F0506-ZV-XX-40T-R

TITLE: 0.5mm Pitch无盖立式正脚位(H=4.0)

APPD

CHKD

DRAW

DATE

Wang

2024.02.22

XFCN兴飞连接器

0769-82001899

www.xfconn.com

DWG NO:

/

VIEW

SCALE

NONE



SHEET

1:1

REV

A1